

Eagle 1500V 72 315-335 Watt

POLY CRYSTALLINE MODULE

Positive power tolerance of 0~+3%

ISO9001:2008, ISO14001:2004, OHSAS18001 certified factory.

IEC61215, IEC61730 certified products.



(4BB)



KEY FEATURES



System Voltage:

The maximum voltage is promoted to 1500V and the module strings are extended by 50% which reduces the overall system BOS.



High Power Output:

Polycrystalline 72-cell module achieves a power output up to 335Wp.



PID RESISTANT:

The Eagle module can pass maximum voltage 1500V PID testing under 60°C /85%RH condition to ensure the outdoor durability and energy output via high-voltage resistance technology.



Low-light Performance:

Advanced glass and surface texturing allow for excellent performance in low-light environments.



Severe Weather Resilience:

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability against extreme environmental conditions:

High salt mist and ammonia resistance certified by TUV NORD.




Temperature Coefficient:



Improved temperature coefficient decreases power loss during high temperatures.

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

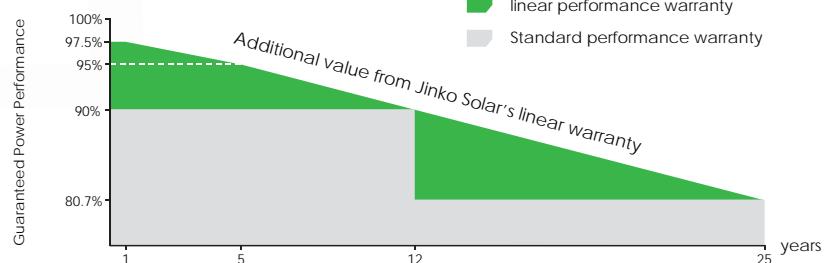

Engineering Drawings

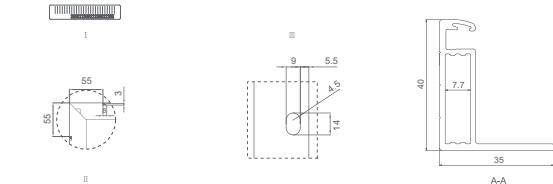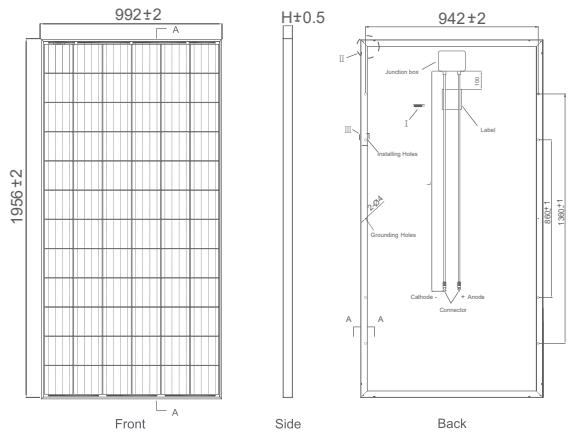


Packaging Configuration

(Two boxes=One pallet)

26pcs/box, 52pcs/pallet, 624 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

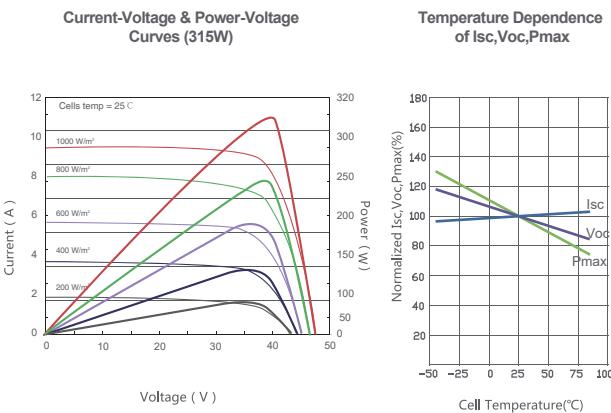

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)	
No.of cells	72 (6×12)	
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)	
Weight	26.5 kg (58.4 lbs.)	
Front Glass	4.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminum Alloy	
Junction Box	IP67 Rated	
Output Cables	TÜV 1×4.0mm², Length: 900mm or Customized Length	

SPECIFICATIONS

Module Type	JKM315PP-72-V		JKM320PP-72-V		JKM325PP-72-V		JKM330PP-72-V		JKM335PP-72-V									
	STC	NOCT																
Maximum Power (Pmax)	315Wp	235Wp	320Wp	238Wp	325Wp	242Wp	330Wp	246Wp	335Wp	250Wp								
Maximum Power Voltage (VmP)	37.2V	34.3V	37.4V	34.7V	37.6V	35.0V	37.8V	35.3V	38.0V	35.6V								
Maximum Power Current (ImP)	8.48A	6.84A	8.56A	6.86A	8.66A	6.91A	8.74A	6.97A	8.82A	7.02A								
Open-circuit Voltage (Voc)	46.2V	43.2V	46.4V	43.7V	46.7V	44.0V	46.9V	44.2V	47.2V	44.4V								
Short-circuit Current (Isc)	9.01A	7.29A	9.05A	7.30A	9.10A	7.34A	9.14A	7.38A	9.18A	7.43A								
Module Efficiency STC (%)	16.23%		16.49%		16.75%		17.01%		17.26%									
Operating Temperature(°C)	-40°C~+85°C																	
Maximum system voltage	1500VDC (IEC)																	
Maximum series fuse rating	15A																	
Power tolerance	0~+3%																	
Temperature coefficients of Pmax	-0.40%/°C																	
Temperature coefficients of Voc	-0.30%/°C																	
Temperature coefficients of Isc	0.06%/°C																	
Nominal operating cell temperature (NOCT)	45±2°C																	

*STC: ☀ Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: ☀ Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s

* Power measurement tolerance: ± 3%